


exalux EXORAA² TRACK PANEL



EXORAA² PANEL is a low profile and versatile LED Panel designed for small studios. It is based on a tiltable low profile design so that low ceilings are no longer a problem at all.

EXORAA² PANEL is the perfect companion to EXORAA² ZOOM and PROFILE for creating well balanced lighting studios.

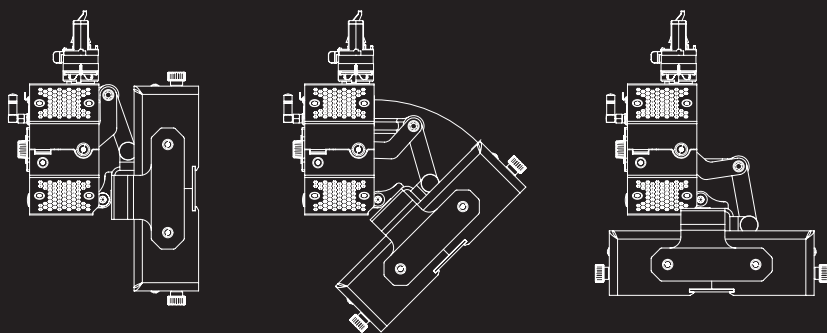

EXORAA² features two articulated units with a reliable and robust mechanical system.

This innovation considerably reduces the fixture's height to be closer to the ceiling.

The 8-way barndoors can be placed and removed easily.

EXORAA² TRACK PANEL IN SHORT:

- > CCT Tunable White Full Spectrum
- > TrueCCT Patented Color Mixing
- > CRI 97 (typ)
- > 120° beam angle
- > Fanless
- > Local or remote control
- > DMX / RDM
- > CRMX, CRMX², W-DMX, Bluetooth
- > 8-way removable barndoors
- > Built-in PSU
- > Track mounting

PARTS & ACCESSORIES

- > EXORAA² TRACK PANEL: EXO.300.001
- > EXORAA² TRACK PANEL CRMX: EXO.300.001
- > EXORAA² SNAPGRID 40°: EXO.300.100
- > EXORAA² BARNDOORS: EXO.300.200

EXORAA² TRACK PANEL BENEFITS

- > Designed for small studios
- > Powerfull source in a small size
- > Noiseless
- > Full Spectrum Cine-grade spotlight





FEATURES

| | |
|------------------|--|
| CCT Range | 3100K > 5800K |
| Beam | 120° |
| Colour Rendition | Ra Min : 96 TLCI Min : 98 |
| Illuminance (1m) | 1 590 lux |
| Control Modes | DMX, Wireless (CRMX) & local |
| Interface | 1.54" TFT display, knob, switches |
| Others | Firmware upgrade from USB port Export/import settings |

WIRELESS INTERFACE

| | |
|-------------------------|---|
| Standard | LumenRadio™ CRMX / CRMX² W-DMX G3/G4s |
| Frequency | CRMX : 2.402 ~ 2.480 GHz |
| Antenna | Whip hinged antenna, 50Ω, female RP-SMA (x2) |
| RF Output / Sensitivity | CRMX/W-DMX : 20dBm |
| Range | Up to 500m |

OPERATING CONDITIONS

| | Min | Typ | Max | |
|--------------|-----|-----|-----|----|
| Storage T° | -20 | | +75 | °C |
| Operating T° | -10 | 25 | +35 | °C |

TECHNICAL SPECIFICATIONS

| | |
|----------------------|-----------------------------------|
| Power Connection | 3-circuits lighting track adapter |
| Power Supply Voltage | 100-240VAC / 50-60Hz |
| Power Consumption | 45 W max (Standby mode : < 0.5W) |
| Housing / Mounting | Aluminium, black |
| IP Rating | IP20 |
| Certifications | CE, RoHS |
| Weight | 3 000 g |

